

THEREC CORPORATION LTD.



Drop Through Rotary valve / normal , quick detachable Food and dairy valve type



Sanitary(Medicine) Type Rotary valve


Diverter Valve, Plug & Ball Type for CIP



Cipriani Harrison Valves Pvt. Ltd.



RID Rotor conference detection

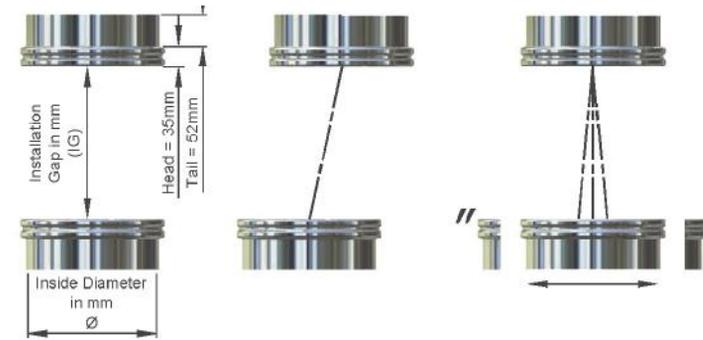

In-line static equipment
IG = CL - 10mm (Minimum)

Off Set equipment
IG = CL - 20mm (Minimum)

Oscillating equipment
IG = CL - 40mm (Minimum)



Made in New sea land



Seeflex Regulations - EC, FDA, USDA, 3A

FROM THIS....



UNTIDY

DIFFICULT TO FIT

PRODUCT BUILD UP ISSUES

TO THIS....



TIDY

EASY TO FIT

ELIMINATES ALL PRODUCT BUILD UP

Bulk material handling, Food grade flexible hose

1.0.5 PROTAPE® PUR 335 MHF FLAT



Abrasion-proof special hose; Flat hose without reinforcement, vibration resistant, highly flexible, smooth interior

Applications: for screening machines, vibrating screening machines and tumbler screening machines; as bellows and compensator; for the food and pharmaceutical industry

Properties: vibration resistant; abrasion-proof; optimized flow properties; food grade wall, complies with: FDA 21 CFR 177.2600 and 178.2010, EU Directive 2002/72/EC, incl. amending Directives 2008/39/EC and 975/2009, German guideline XXXIX BfR polyurethane; odourless and tasteless; microbe and hydrolysis resistant; good resistance to chemicals; according to the German TRBS 2153 (formerly BGR 132), the spiral can be earthed

Temperature Range: -40 °C approx. to +90 °C approx.; short time to +125 °C approx.

Design, material: PROTAPE® tape hose; extruded tape; wall thickness 1.0 mm approx.; wall: special premium ether-polyurethane (Pre-PUR®); smooth interior



1.2.5 AIRDUC® PUR 350 MHF




Abrasion-proof suction and transport hose; Light, smooth interior

Applications: for abrasive solids such as dust, powder, fibres and chips; for gaseous media such as oil vapors and welding smoke; for de-dusting and suction plants

Properties: highly abrasion-proof; optimized flow properties; food grade wall, complies with: FDA 21 CFR 177.2600 and 178.2010, EU Directive 2002/72/EC, incl. amending Directives 2008/39/EC and 975/2009, German guideline XXXIX BfR polyurethane; microbe and hydrolysis resistant; good resistance to chemicals; according to the German TRBS 2153 (formerly BGR 132), the spiral can be earthed

Temperature Range: -40 °C approx. to +90 °C approx.; short time to +125 °C approx.


Design, material: AIRDUC® profile hose; spring steel wire firmly embedded in wall; wall: special premium ether-polyurethane (Pre-PUR®); wall thickness 0.7 mm approx.

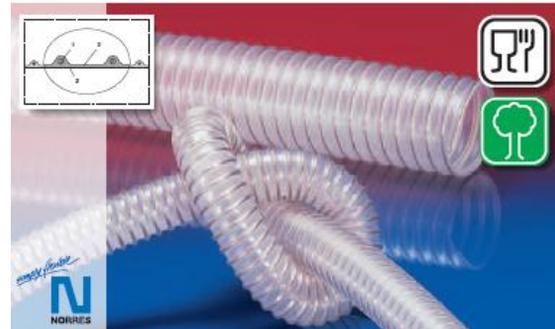


simply flexible

NORRES


TECHNISCHE SCHLÄUCHE
INDUSTRIAL HOSES




Highly abrasion-proof Pre-PUR® suction hoses / transport hoses

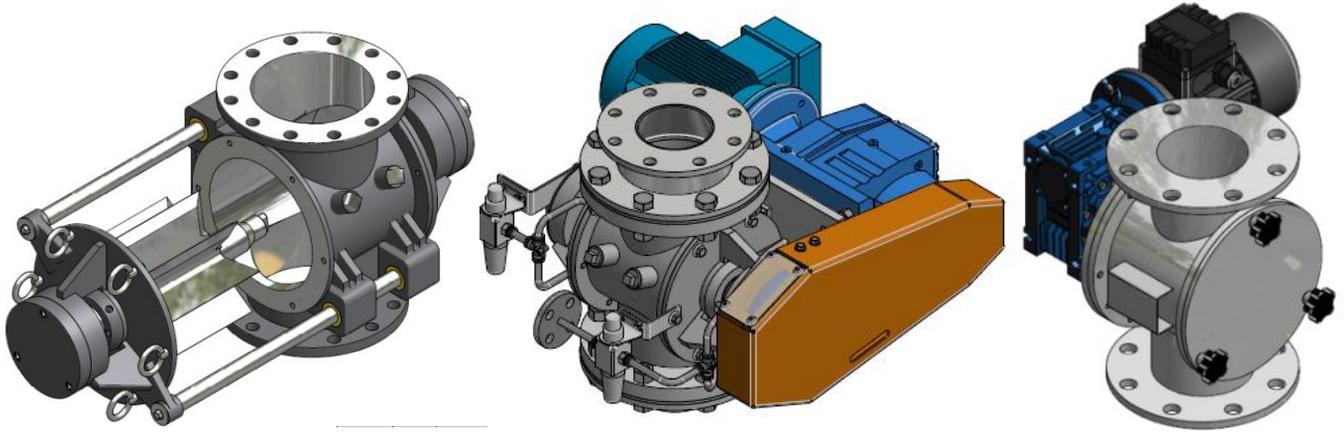

TRC Rotary & Diverter Valve and Other Component for Food Grade Bulk Materials Handling Process

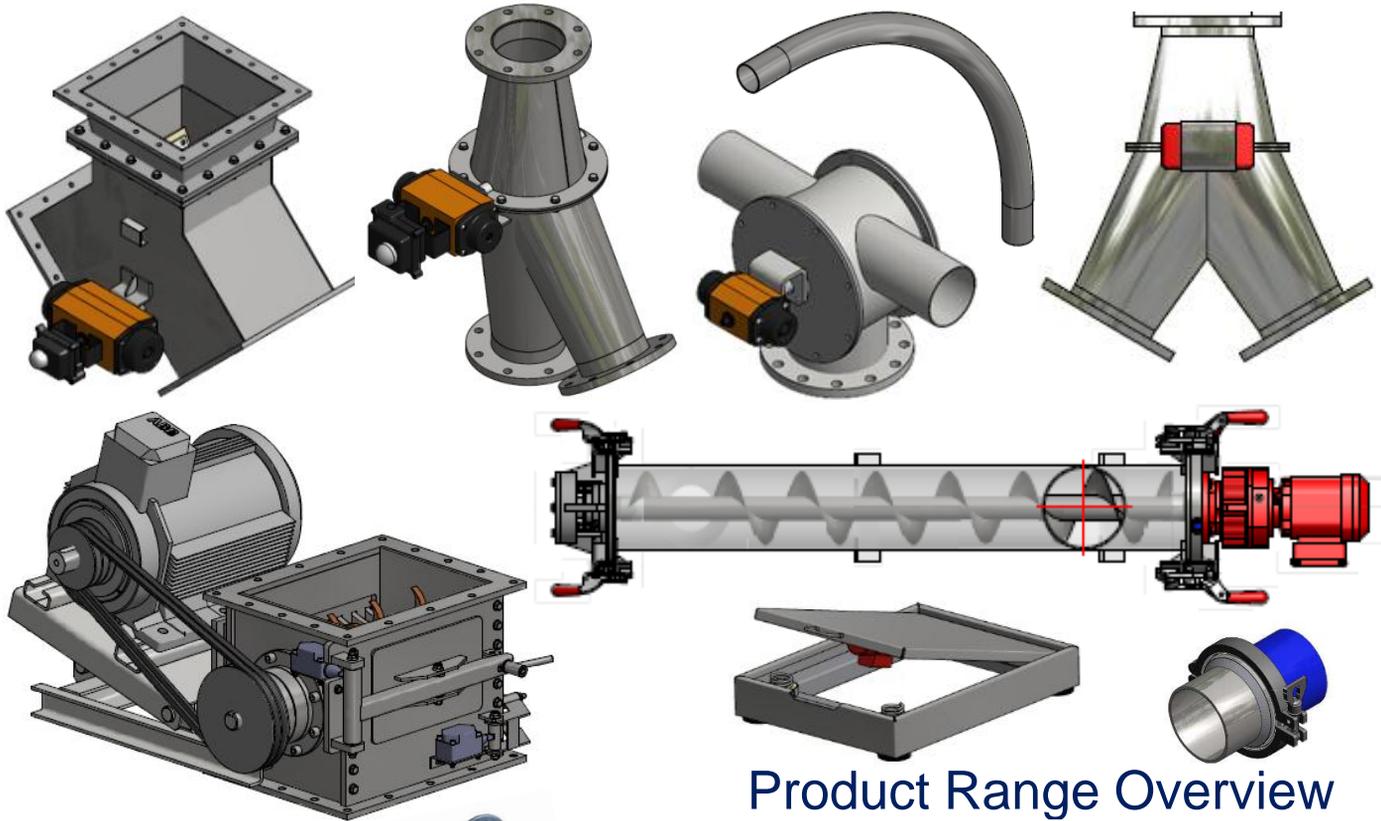

Product Range Overview

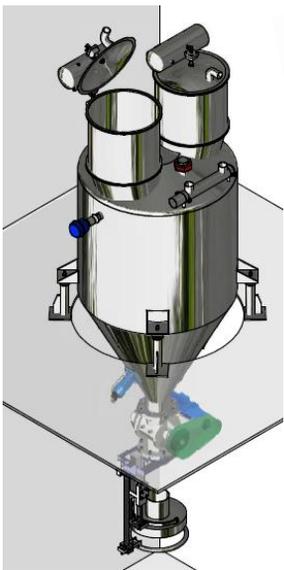

Food grade
Easy clean
Bag filter



Quick detachable / Normal / Slide arm, Easy clean
Food grade Rotary Feeder in SUS 304, 316
Air lock type and Feeding type



Quick detachable, Easy clean, Food grade, Screw Feeder in SUS 304, 316



Quick detachable, Movable, Food grade, Screw Feeder in SUS 304, 316



Easy Clean, Food grade, Lump Breaker



Easy Clean, Food grade, Magnetic Separator



Long Bends & Venture



Food grade, Loading Bellow in SUS 304, 316



Food Sampling Valve



Food grade, Diverter Valve

